



Features

- Temperature transducer for mounting in the piping
- Temperature measuring with integrated Pt 100 measuring resistor
- Output signal: Pt 100, 2(3)-wire technology

Options

- Classification per SIL 2
- Transmitter can be integrated

Application area

- Food industry
- Pharmaceuticals

Application

Inline temperature transducers allow a dead-zone free measuring of the pipe wall temperature. Measuring is performed without cross-sectional alterations and without contact of the medium with the measuring resistor. The transducer is integrated in the piping by intermediate screwing. A variety of screwings are available for different applications.

Technical Data

Mechanical design

pipe body and necktube with integrated measuring resistor

Material

stainless steel mat.-no. 1.4435 (316L)
other materials upon request

Connection head

selective

- model B, cap with 2 slotted screws, mat. aluminium, IP 54
 - model BUZH, high spring cover with slotted screw, mat. aluminium, IP 65
 - field housing Ø 60 mm, screw cap, stainless steel mat.-no. 1.4305 (303), IP 67
- further connection heads upon request

Process connection

screwing as part of the piping, connections and DN's see order details; other values upon request

Pressure stage

see table under dimensions

Measuring resistor

Pt 100, class A per DIN EN 60751

Functional safety

per EN 61508, classification per SIL 2; without transmitter, only

Process temperature

-20...200 °C

Response time

dependent on medium and the ambient conditions, e.g. with water medium:
pipe: DN 25

Rise of 20...90 % of the final temperature

Q= 0.5 m ³ /h	t= 162 s
Q= 1 m ³ /h	t= 54 s
Q= 1.5 m ³ /h	t= 39 s

Weights

see table

Integrated transmitter

suitable Pt 100 transmitters can be integrated into the connection head.

Options:

- instead of terminal block
 - mounting in the spring cover of the connection head BUZH
- see product group T4 for analog or digital transmitters

LED-on-site indication

programmable LED-on-site indication for stainless steel field housing (Ø 60 mm), see data sheet M6-031.

Information on other models upon request or see order details





Dimensions

Connection heads

connection head model B,
cap with 2 slotted screws
mat. aluminium, IP 54

connection head model BUZH,
high spring cover with slotted screw,
mat. aluminium, IP 65


connection head field housing,
screw cap,
mat. stainless steel, IP 67

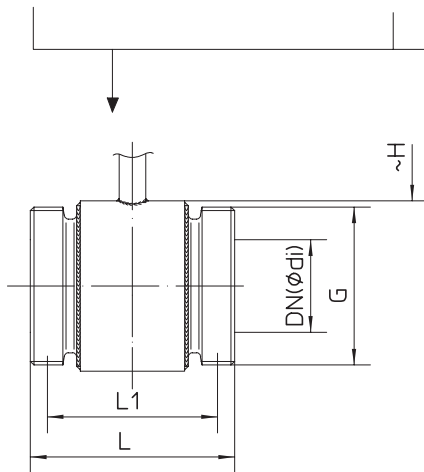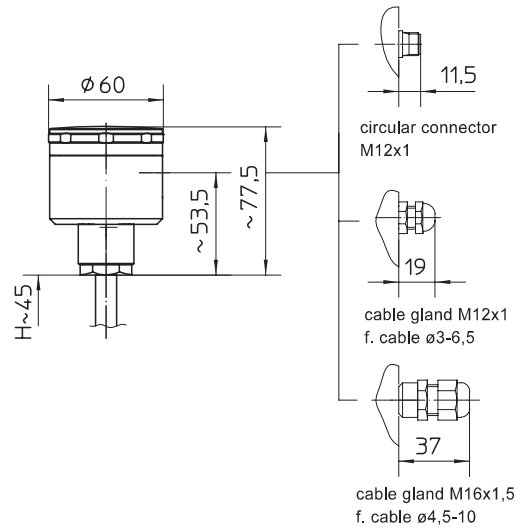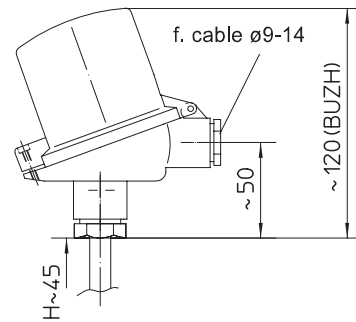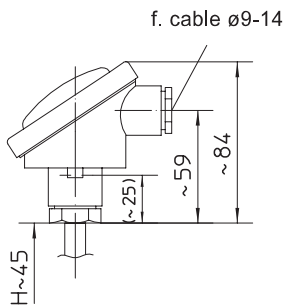

threaded pipe connection
per DIN 11851 or DIN 11864-1

dimensions/sanitary connection						
DN	di	PN ¹	G	L	L1	weight appr. kg
10	10	40	Rd. 28 x 1/8	80	72	0.4
15	16	40	Rd. 34 x 1/8	80	72	0.5
20	20	40	Rd. 44 x 1/6	84	72	0.6
25	26	40	Rd. 52 x 1/6	84	70	0.7
32	32	40	Rd. 58 x 1/6	84	70	0.8
40	38	40	Rd. 65 x 1/6	84	70	0.9
50	50	25	Rd. 78 x 1/6	84	70	1.1
65	66	25	Rd. 95 x 1/6	88	72	1.4
80	81	25	Rd. 110 x 1/4	102	86	1.9
100	100	25	Rd. 130 x 1/4	102	82	2.4
125	125	16	Rd. 160 x 1/4	110	86	2.9


¹ up to 140 °C process temperature

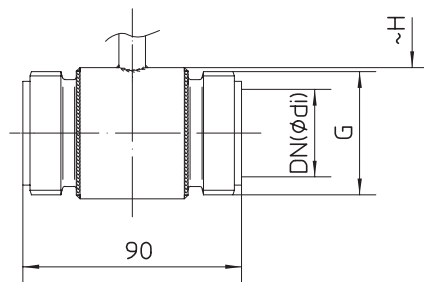

IDF connection
per ISO 2853

dimensions/IDF connection					
DN		PN ²	di	G	weight appr. kg
1"	25	40	22.6	TR37x3.175	0.5
1 1/2"	38	40	35.6	TR50.5x3.175	0.6
2"	51	25	48.6	TR64x3.175	0.8

² up to 140 °C process temperature


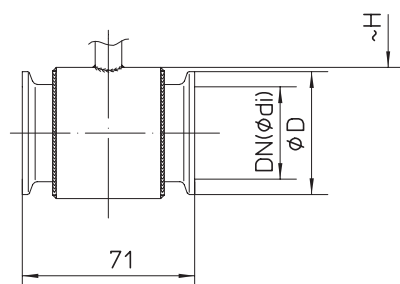


Clamp connection
per DIN 32676, ISO 2852
DIN 11864-3 or Tri-Clamp

dimensions/clamping joint					
DN		PN ³	di	D	weight appr. kg
1 1/2"	38	16	35.6	50.5	0.5
2"	51	16	48.6	64	0.6

³ up to 120 °C process temperature

Connection diagram

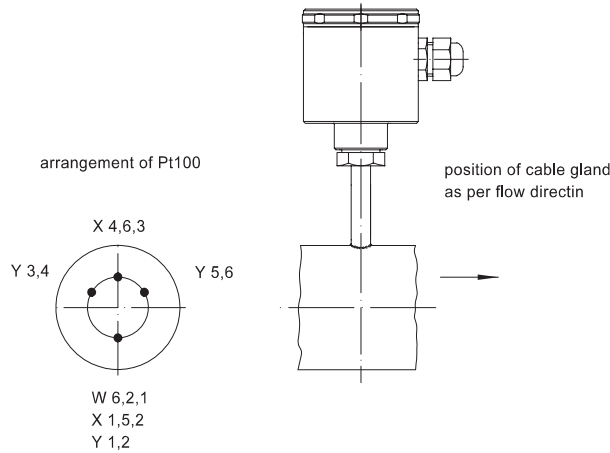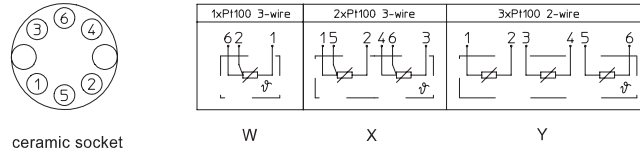

Order Details - please give additional specifications for models not listed -

Inline temperature transducer with Pt 100		GA2200		
surface roughness	· according to hygienic design (see data sheet D1-030)		HY	
process connection/ nominal width	sanitary connection per DIN 11851 (both sides) internal diameter per DIN 11850			
	· DN 10		A1010	
	· DN 15		A1012	
	· DN 20		A1013	
	· DN 25		A1014	
	· DN 32		A1015	
	· DN 40		A1016	
	· DN 50		A1017	
	· DN 65		A1018	
	· DN 80		A1019	
	· DN 100		A1020	
	· DN 125		A1021	
		threaded couplings per IDF ISO 2853 (both sides) internal diameter for ISO-tubes per DIN 2463		
		· 1"		B4532
	· 1 1/2"		B4533	
	· 2"		B4535	
	Clamp connection per ISO 2852 (both sides) internal diameter for ISO-tubes per DIN 2463			
	· 1 1/2"		C5133	
	· 2"		C5135	
material pipe body	· stainless steel mat.-no. 1.4435 (316L)		G3	
	· as in writing		G9	
measuring resistor	· 1 x Pt 100, 3-wire technology, standard		E12	
	· 2 x Pt 100, 3-wire technology, arrangement opposing		E22	
	· 3 x Pt 100, 2-wire technology, arrangement: 120°		E32	
connection head	· model B	electrical connection cable gland M20x1.5 nickel	T11	
	· model BUZH	plated brass cable Ø 9-14	T15	
	· field housing	cable gland	polyamide cable Ø 3-6.5	T47
			black cable Ø 4.5-10	T47.40
		st. steel cable Ø 3-6.5	T47.21	
	with circular connector M12x1		T47.51	
additional features (to be indicated in case of need, only)				
incl. transmitter (pls. specify separately)	· mounting on the measuring insert (instead of terminal block)		Z1	
	· mounting in the spring cover of the connection head BUZH		Z2	
material certificate per DIN EN 10204-3.1			W1020	
functional safety per EN 61508, classification per SIL 2			W2604	
transmitter with resistance thermometer calibrated			W4057	
process connection electropolished			W4035	
Order code (example):		GA2200	HY	
		A1013	G3	
		E12	T47	