



## Features

- Measuring ranges 0...160 mbar to 0...400 bar rel.  
0...0.4 bar to 0...25 bar abs
- Piezoresistive sensor element
- Diaphragm seal operation with reduced inner volume
- Zero point and measuring span can be adjusted externally by means of a potentiometer
- Measuring system overload protected
- Stainless steel housing as standard or field housing
- Degree of protection IP 65, option: IP 67
- Output signal: 4...20 mA, option: 0...20 mA, 0...10 V DC

## Options

- Explosion protection

## Application area

- Food industry
- Pharmaceutical industry
- Biotechnology

## Application

The analog pressure transmitter UNIVERSAL is suited for relative and absolute pressure measurement. Because of the reduced inner volume of the pressure chamber the transmitter is especially suited for connection to diaphragm seals. The diaphragm seal can be connected directly, via a capillary or via a temperature decoupler. For further information see diaphragm seal data sheets D5.

## Technical Data

### Housing designs

#### Standard housing with right angle plug

material: st. steel mat.-no. 1.4301 (304)  
degree of protection: IP 65  
silicon cover plate for trimming potentiometers.  
Right angle plug as per DIN EN 175301-803-A (DIN 43650, form A) with cable gland M16x1.5 mm, cable diameter 4...10 mm.  
Inner chamber aeration for measuring ranges  $\leq 10$  bar.

#### Field housing, solid design

material: st. steel mat.-no. 1.4301 (304)  
degrees of protection:  
standard

- IP 65, inner chamber aeration via integrated sintered filter, only for excess pressure measuring ranges  $\leq 10$  bar.

Option:

IP 67, inner chamber aeration via connection cable for excess pressure measuring range  $\leq 10$  bar.

Screwable cover ring with O-ring seal for the externally accessible trimming potentiometers.

Screwable cover for connection chamber with O-ring thread protector.

Connection terminals 4 mm<sup>2</sup>.

Cable gland M16x1.5 for cable diameter 4.5...10 mm, material polyamide.

### Process connection

diaphragm seal systems  
see product range D5

### Measuring system

piezoresistive measuring bridge

### Material

socket: st. steel mat.no. 1.4404 (316L)

### Weights

standard housing: approx. 200 g  
field housing: approx. 750 g  
without diaphragm seal

### Storage temperature range

-25...+80 °C

### Limiting temperature range

-25...+70 °C

### Rated temperature range

-10...+70 °C

### Temperature influence

on zero point:  $\leq 0.03$  % of meas. span /K  
on meas. span:  $\leq 0.03$  % of meas. span /K

### Auxiliary power supply

standard version:

- nominal voltage 24 V DC
- function range
- 2-wire circuitry 14...30 V DC
- 3-wire circuitry 16...30 V DC
- max.permiss.operating voltage 30 V DC

Ex design:

- permiss. voltage range of 2-wire circuitry 15...30 V DC
- Ex design:
- permiss. voltage range of 3-wire circuitry 16...30 V DC

### Standard measuring ranges

see order details

### Overload limits UE

for short-time overload, see order details

### Overload influence

$\leq 0.1$  % f.s.

### Output signal

4...20 mA, 2-wire circuitry, standard.  
Further possibilities see order details

### Test output (with field housing only)

non interruptible output current measurement via integrated LOC diode

### Current limitation in output signal

max. output current approx. 30 mA

### Supply voltage influence

$\leq 0.2$  % f.s. / 10 V

### Linearity error incl. hysteresis

$\leq 0.3$  % f.s. (limit point calibration)

### Adjustable range

zero point and measuring span  
approx.  $\pm 10$  %

### Response time

$\leq 20$  ms

To be continued on page 2

**Technical Data (continued)**

**Ex-approval**

The limit values detailed in the EC-Type Examination Certificate are to be observed!

EC-Type Examination Certificate

TÜV 02 ATEX 1971 X and

IECEX TUN 04.0008X

type of ex-protection:

Ex II 1/2G Ex ia IIC T4/T5/T6 Ga/Gb

Ex II 2G Ex ia IIC T4/T5/T6 Gb

IECEX TUN 04.0008X

type of ex-protection:

Ex ia IIC T4/T5/T6 Ga/Gb

Ex ia IIC T4/T5/T6 Gb

Ex ia I Ma

Since the intrinsically safe circuits are connected with the earth potential for safety reasons, potential equalization has to exist in the complete course of the erection of the intrinsically safe circuits.

Ambient temperatures

Ex II 1/2G Ex ia IIC T4/T5/T6 Ga/Gb

Ex ia IIC T4/T5/T6 Ga/Gb

Ta [°C]	TM [°C]	temperature class
70	40	T6
70	60	T5

70	60	T4
----	----	----

Ambient temperatures

Ex II 2G Ex ia IIC T4/T5/T6 Gb

Ex ia IIC T4/T5/T6 Gb

Ta [°C]	TM [°C]	temperature class
70	55	T6
70	70	T5
70	70	T4

Ambient temperatures Ex ia I Ma:

Ta = Tm 70°C max

**Electrical data**

Sum of maximum values in the intrinsically safe circuits

Ui = 30 V

Ii = 100 mA

Pi = 0,7 W

The table shows the values for different pressure transmitter signals:

signal mode	Ci [nF]	Li [µH]
2-wire 4...20 mA	33	20
3-wire 0(2)...10 V	43	30

3-wire (0)4...20 mA	43	30
---------------------	----	----

**Caution:**

Make sure that there is equipotential bonding along the entire wiring run both inside and outside the explosion hazardous area.

Switch off device if it is installed in zone 0 and in temperature class T5 and T6 and it fails!

**Burden**

- current output

2-wire circuitry

$$\text{standard version } R_a = \frac{U_a - 14 \text{ V}}{20 \text{ mA}} \text{ (KOhm)}$$

$$\text{with explosion protection } R_a = \frac{U_a - 15 \text{ V}}{20 \text{ mA}} \text{ (KOhm)}$$

- voltage output

a current of 20 mA can be obtained in the case of devices with power output.

**Burden influence**

for 500 Ohm burden of change: ≤ 0.1 % f.s.


**EMC-Test**

- noise immunity as per EN 50082, section 2, March 95 issue for industry
- emitted interference as per EN 50081, section 1, 1993 issue for residential and industrial areas


**Information on other models see order details or upon request.**

**Dimensions**


design standard housing

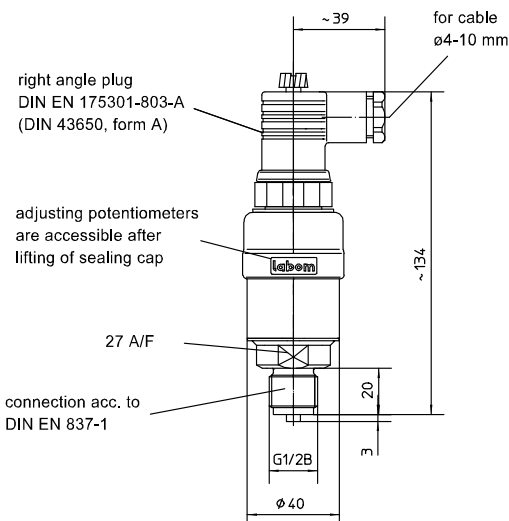


design field housing

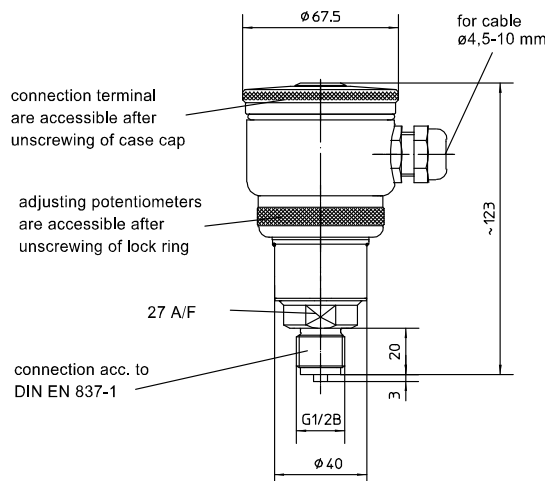

**Connection diagram**

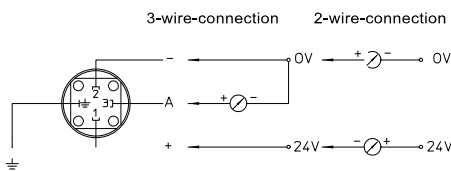


design standard housing

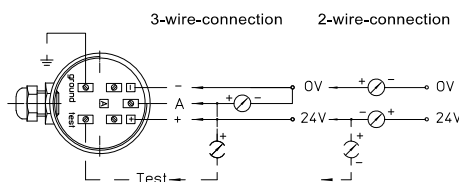

design field housing


Standard position of el. connections.

Pls. specify different position.

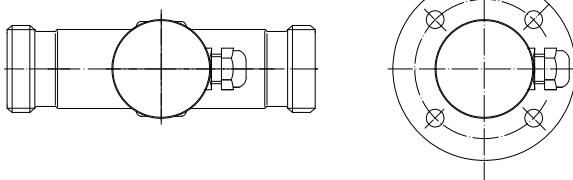

**Designs**

different models of diaphragm seals  
with representation of usual device connections

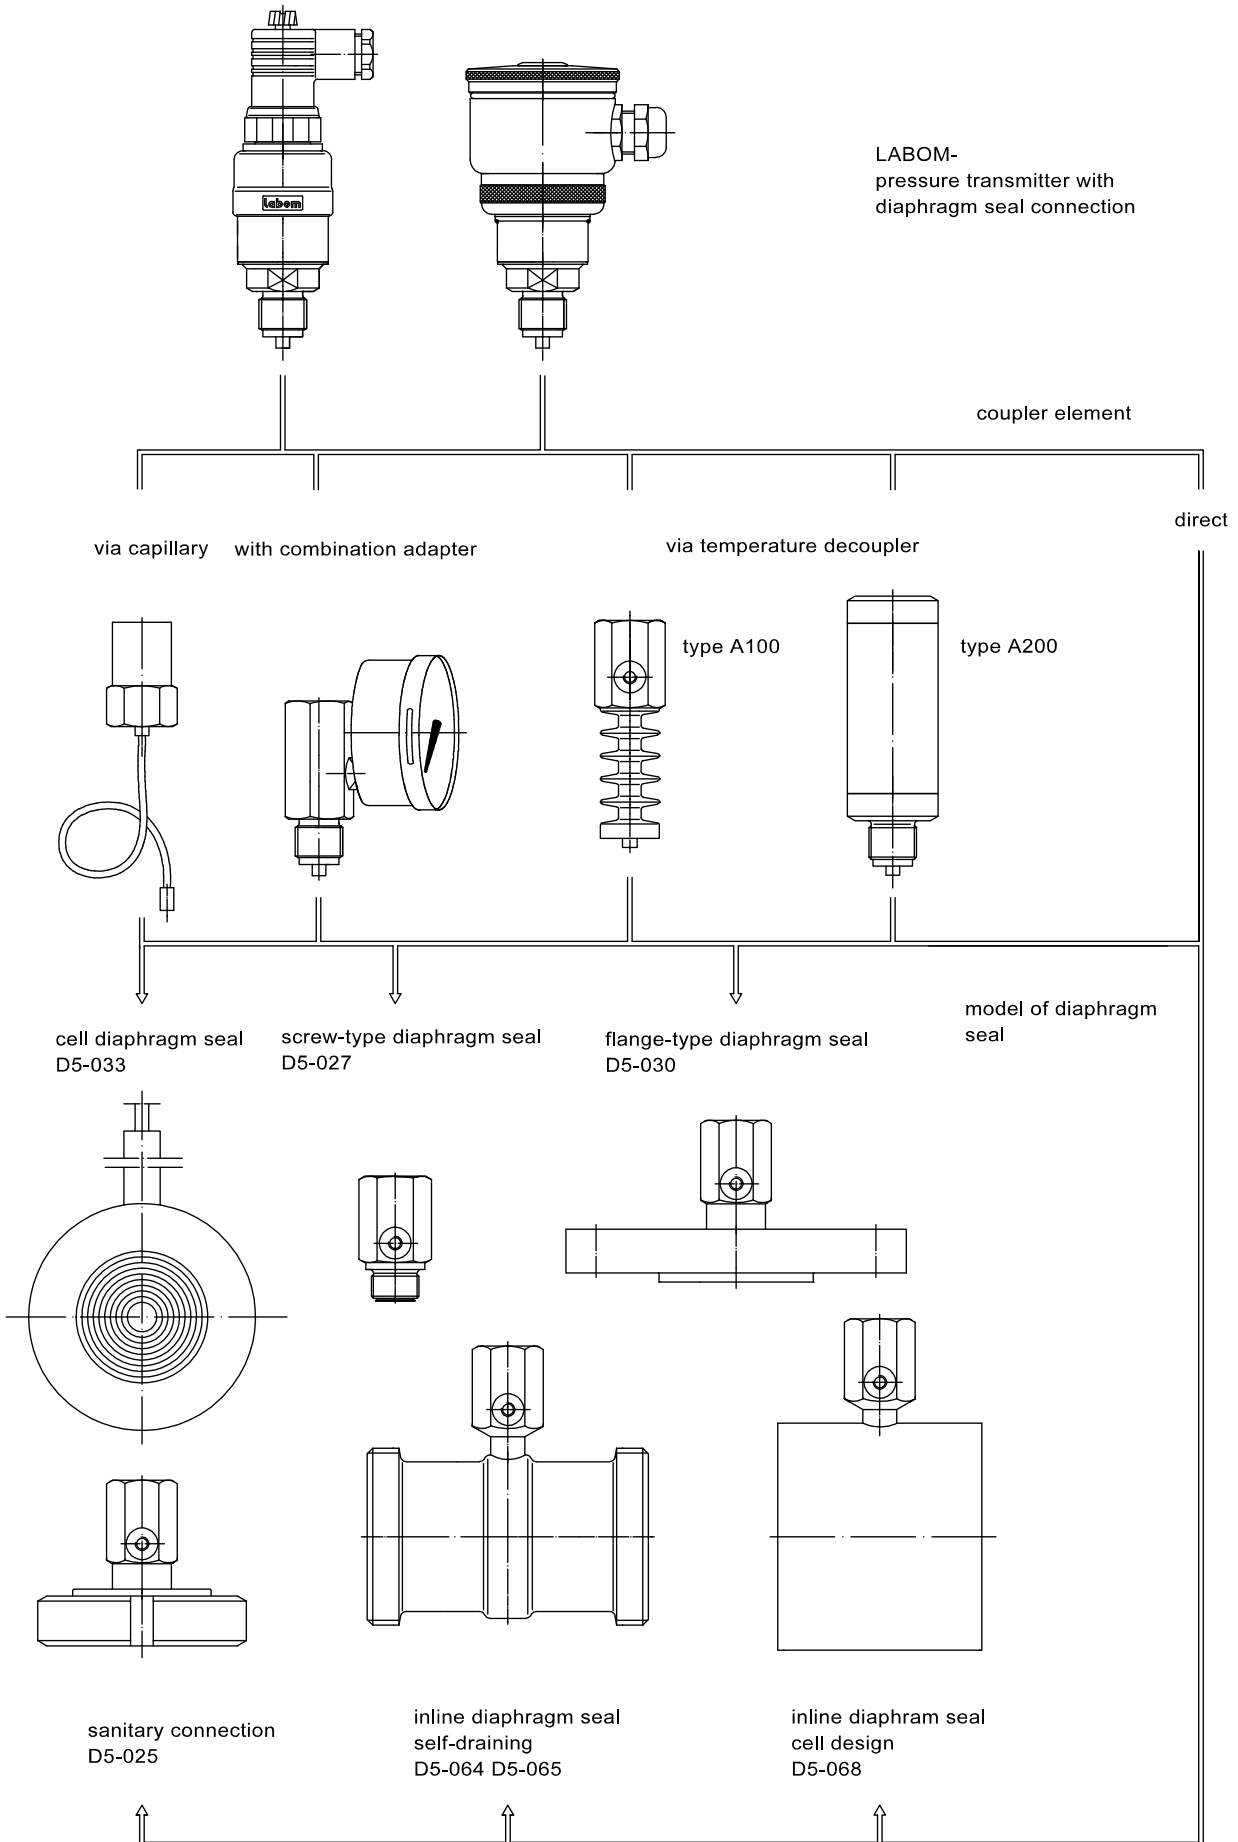

LABOM-  
pressure transmitter with  
diaphragm seal connection

coupler element

direct

via capillary with combination adapter

via temperature decoupler

type A100

type A200

cell diaphragm seal  
D5-033

screw-type diaphragm seal  
D5-027

flange-type diaphragm seal  
D5-030





model of diaphragm  
seal

sanitary connection  
D5-025

inline diaphragm seal  
self-draining  
D5-064 D5-065

inline diaphragm seal  
cell design  
D5-068

**Order Details** - please give additional specifications for models not listed -

Pressure transmitter UNIVERSAL for diaphragm seal operation					
design	· standard housing				CC102 .
	· field housing				CC202 .
version	· standard				0
	· explosion protection, type of ex-protection s. below				1
measuring range		overload protection UE bar <sup>1</sup>			
	-1...0.6 bar <sup>4</sup>	10			A1087
	-1...1.5 bar <sup>4</sup>	10			A1088
	-1...3 bar <sup>4</sup>	16			A1089
	-1...5 bar <sup>4</sup>	30			A1090
	-1...9 bar <sup>4</sup>	30			A1091
	-1...15 bar <sup>4</sup>	30			A1092
	0...160 mbar	1			A1009
	0...250 mbar	1			A1010
	0...0.4 bar	3			A1051
	0...0.6 bar	3			A1052
	0...1 bar	3			A1053
	0.2...1 bar	10			A1080
	0...1.6 bar	10			A1054
	0...2.5 bar	10			A1055
	0...4 bar	20			A1056
	0...6 bar	60			A1057
	0...10 bar	60			A1058
	0...16 bar	60			A1059
	0...25 bar	60			A1060
	0...40 bar	100			A1061
	0...60 bar	200			A1062
	0...100 bar	200			A1063
	0...160 bar	250			A1064
	0...250 bar	500			A1065
	0...400 bar	500			A1066
	0...0.4 bar abs	3			B1051
	0...0.6 bar abs	3			B1052
	0...1 bar abs	3			B1053
	0...1.6 bar abs	10			B1054
	0...2.5 bar abs	10			B1055
	0...4 bar abs	10			B1056
0...6 bar abs	60			B1057	
0...10 bar abs	60			B1058	
0...16 bar abs	60			B1059	
0...25 bar abs	60			B1060	
output signal	· 4...20 mA, 2-wire				H1
	· 0...20 mA, 3-wire				H2
	· 0...10 V, 3-wire				H4
	· 0...5 V, 3-wire				H6
<b>additional features (to be indicated in case of need, only)</b>					
type of ex-protection (for ex-protection only)	·  II 2G Ex ia IIC T4 Gb				S69
	·  II 2G Ex ia IIC T5/T6 Gb, standard				S68
	·  II 1/2G Ex ia IIC T4 Ga/Gb				S62
	·  II 1/2G Ex ia IIC T5/T6 Ga/Gb				S66
	IECEx	· Ex ia IIC T4/T5/T6 Ga/Gb			
	· Ex ia IIC T4/T5/T6 Gb				
	· Ex ia I Ma				
degree of protection <sup>3</sup> (field housing)	· IP 65 (standard) for measuring ranges ≤ 16 bar <sup>5</sup>				T2
	· IP 67 <sup>2</sup>				T1
<b>Order code (example):</b>					
					CC1020 A1010 H4

<sup>1</sup> special excess pressure protection (UE) upon request<sup>2</sup> aerated cable with < 10 bar is required<sup>3</sup> design field housing only<sup>4</sup> negative relative pressure ranges (e.g. -1...+1 bar) are adjusted at works to 0...100%, e.g. 4...20mA.

Temporary operation up to -1 bar at room temperature and continuous operation up to -500 mbar at max. 50°C is admissible.

Long-term vacuum measurements at temperatures above +50°C may cause changes in the properties of the measurement device.

Vacuum-proof designs are available upon request

<sup>5</sup> not valid for absolute pressure